





ENERTRONIC modular Three Phase UPS System with Modular, Hot-Plug Design

Introduction

BENNING has been supplying modular DC power solutions for IT, telecom and industrial applications for more than 25 years. These DC systems are very reliable as they consist of parallel operating hot-plug DC power modules with n+1 redundant configuration. This design allows easy and rapid replacement as well as upgrade or downgrade of the power capacity following any change in the load requirements.

ENERTRONIC *modular* the modular UPS System with premium Availability and high Flexibility

Each module within the ENERTRONIC *modular* is an independent double conversion UPS with three phase input, rectifier, inverter, static-bypass, DSP regulator and three phase output.

The power modules, with true hot-plug design, allow the addition or replacement of modules without any power interruption. The advanced decentralised parallel architecture of the ENERTRONIC *modular* UPS system offers maximum power protection availability. (Fig. 1)

Features of the ENERTRONIC *modular* UPS Systems:

- Scaleable UPS systems with hot-plug power modules
- N+1 redundancy ensures maximum availability
- Advanced UPS design with IGBT and MOSFET semiconductors and DSP processors
- UPS classification VFI-SS-111 in accordance with EN/IEC 62040-3
- High efficiency, also at partial load, reduces energy losses
- Sinewave input current (powerfactor 0.99)
- Input current with low harmonic distortion (THDi < 4 %)
- Short MTTR (Mean Time To Repair)
 Replacement of modules without load interruption
- Online diagnosis and monitoring

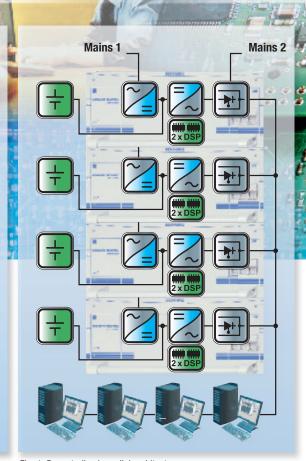


Fig. 1: Decentralised parallel architecture

The modules can be replaced without the loss of output power.

Following this trend in the standby DC market, more and more customers are now demanding a similar modular, n+1 redundant, solution for their UPS requirements.

BENNING followed these customers requests and has developed the ENERTRONIC *modular* UPS range with parallel operating, three phase hot-plug, UPS modules.

ENERTRONIC *modular* UPS systems are available with 20 kVA or 40 kVA modules. These modules provide scalable solutions with steps between 40 kVA and 480 kVA (n+1 redundant).

The modular design simplifies system upgrade or downgrade and avoids high investment costs for power which is not required at initial installation.

ENERTRONIC modular Reliable Cost

Reliable, Cost Saving, Scaleable

DSP Technology

In each ENERTRONIC module two Digital Signal Processors (DSP) are responsible for regulation and monitoring. Thanks to this advanced design the quantity of electronic components has been reduced compared to conventional UPS systems which results in better MTBF figures.

The power section of the ENERTRONIC modules is based on MOSFET and IGBT technology which results in less module weight and size (30 % to 50 % lower), compared to conventional UPS systems.

High Efficiency, even at partial loads, means less TCO (Total Cost of Ownership)

High efficiency of UPS systems is essential to reduce operating costs.

The ENERTRONIC *modular* UPS has been designed to provide high efficiency at full rated loads and also at partial loads. (Fig. 2)

This excellent efficiency lowers the UPS energy consumption as well as the investment and operating costs for the airconditioning equipment.

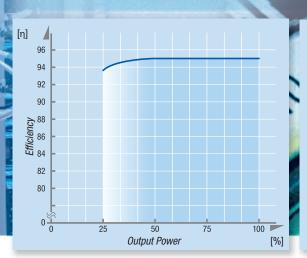


Fig. 2: Efficiency versus output power (40 kVA module)

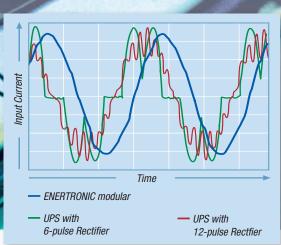


Fig. 3: The near unity power factor of the ENERTRONIC modular, results in very low harmonic distortion on the mains.

Sinewave Input Current and less than 4 % THDI results in Investment and Energy Savings (Fig. 3)

The level of harmonic pollution on the input current of conventional UPS systems is about 33 %.

Input cables and fuses as well as generator sets have to be oversized to operate these UPS systems as they take additional reactive power from the mains.

In some cases, especially for bigger UPS systems, 12-pulse rectifiers or filter systems are necessary to compensate this reactive power value, resulting in increased investment and operating costs.

The THDI value of ENERTRONIC *modular* UPS systems is less than 4 %. Thanks to the inbuilt active power factor correction, the cos phi of the sinewave input current is 0.99. As a result of these advantages, ENERTRONIC *modular* UPS systems do not need any filter systems or oversized gensets.

Classification of the ENERTRONIC *modular* UPS in accordance with EN/IEC 62040-3 (Fig. 5)

The ENERTRONIC *modular* UPS is classified as level VFI-SS-111 in accordance with EN/IEC 62040-3.

Part 1 (VFI, VI, VFD) defines the dependency of the UPS output with regard to the mains input

Part 2 (SS, XX,YY) defines the output waveform, sinusoidal or non-sinusodial

Part 3 (111, 222, 333) Defines the output voltage limits under dynamic deviations

Part 1 (VFI): The output voltage is independent of all mains voltage and frequency variations.

Part 2 (SS): The output waveform is sinusoidal with all linear and non-linear loads.

Part 3 (111): The dynamic deviation of the output voltage will not exceed the three tolerance curves of the standard EN/IEC 62040-3 if

- the operation mode changes
- during linear load steps
- · during non-linear loadsteps

ENERTRONIC modular Simple Operation, rapid Diagnosis



ENERTRONIC modular Availability without Compromise

BEST PARTICUE :



Fig. 4: Comparison of parallel redundant
UPS configurations. ENERTRONIC modular
compared to traditional standalone UPS systems.

Hot-plug modular redundant Design means highest Availability and short MTTR (Mean Time To Repair)

The modular n+1 redundant concept of the ENERTRONIC *modular* UPS, together with real hot-plug design, provides the highest availability of power protection.

The redundant design still provides 100 % power to the load even if one module fails.

The replacement of the faulty module can be achieved in less then 10 minutes if a spare is available on site. After replacement, the UPS is back to redundant operation. Redundancy with conventional UPS systems requires a second complete system for parallel operation (Fig. 4).

Compact UPS Cabinets with high Power Density need less Floor Space The dimensions of standard cabinets for 20 kWA modules

The dimensions of standard cabinets for 20 kVA modules are 1800/2000 x 600 x 800 mm (H x W x D).

The cabinets are designed to accommodate up to 5 or 6 power modules (depending on height) with 20 kVA modules providing 80 kVA or 100 kVA system power in n+1 configuration

No additional cabling is required for future power upgrade.

For the integration of batteries and 20 kVA power modules combination cabinets are available. (Fig 5)

Improved Output Power and higher Power Density with 40 kVA Power Modules

The dimensions of system cabinets designed for 40 kVA power modules are 1800/2000 x 800 x 800 mm (HxWxD).

These cabinets can accommodate up to four or five 40 kVA power modules (depending on height) providing 120 kVA or 160 kVA system power in n+1 configuration.

More Output Power with Distribution Cabinets

The 2000 mm high standard cabinets can accomodate up to six 40 kVA power modules if the system distribution cabinet with built-in manual by-pass and input and output terminals is used.



FIG. 7: ENERTRONIC modular with distribution cabinet, output power 200 kVA (n+1)

with Front Panel Display

UPS Remote Monitoring and Management System MCU

The MCU provides local and remote monitoring and control of the UPS ENERTRONIC *modular*.

The front panel with graphic display and keypad enables easy local operation and monitoring of the system as well as the selection of different options and parameters.

The built-in event recorder stores up to 250 events which are date and time stamped.

Remote control and monitoring of the MCU is possible via a modem or over the Internet.

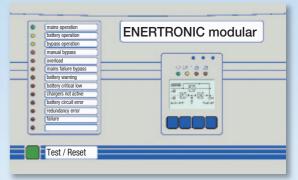


Fig. 8: Display and control unit




6

ENERTRONIC modular Local and Remote Monitoring System

ENERTRONIC *modular* with maximum Output Power Capacity

With two UPS cabinets each housing six power modules and one distribution cabinet, the output power capacity increases to 440 kVA (n+1 configuration).

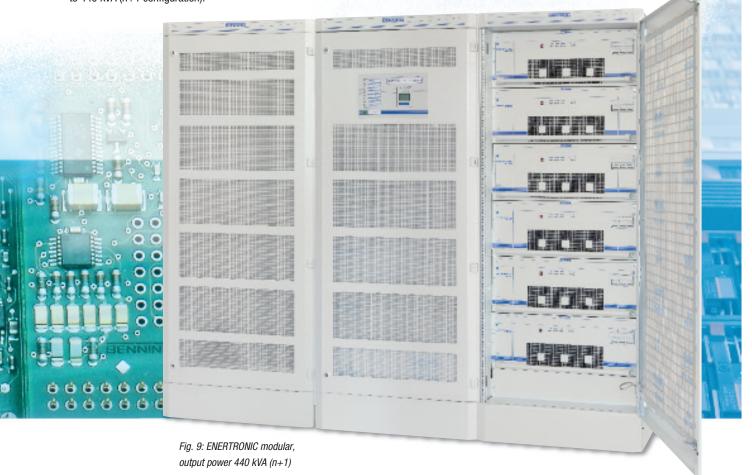

SNMP – Network Management Integration

The internationally recognised simple network management protocol (SNMP) is provided as standard and allows simple monitoring of the UPS.

The ENERTRONIC *modular* UPS can also be integrated into Network systems like HP-Openview, IBM-Netview, Novell NMS and other compatible systems.

RCCMD automatic Power-Shutdown and Monitoring Software

RCCMD allows the automation of different actions based on certain events. E.g. arranged shut down of individual PC's over the network or broadcasting messages or e-mails e.g. battery undervoltage.

BENNING MCU Service-Software

This software package allows the complete monitoring and control of the ENERTRONIC *modular* UPS on site or via serial interface, network or modem.

It is also able to monitor realtime processing information and past events.

UPS Communication - 3 Possibilities: • System Shutdown (local connection Shutdown batch alarm cable (e.g. AS/400/WinNT) via relay contacts) Shutdown and **UPS** management Shutdown routine and serial connection (local connection UPS Mgmt. over UM console over RS232) Shutdown and **UPS** management serial connection network (SP/WAN - over LAN/WAN) Network connection Shutdown over UM agent (UM client) plus shutdown routine **ÙPS Mgmt**. over UM client (UM console)

Remote Control

The following remote control functions are provided as standard

- Emergency power off (EPO)
- Generator operation (blocks the bypass)
- External battery disconnecting switch open

Technical Specification ENERTRONIC modular 40 – 480 kVA

| [kW] 32 48 64 80 96 | UPS ENERTRONIC <i>modular</i> | with 20 I | «VA modules | 3 | | | | | |
|--|--|----------------|-------------------|---------------------------------------|-----------------|-----------------|----------------|------------|--|
| No. of modules | Rated output power | [kVA] | 40 | 60 | 80 | 100 | 120 | | |
| Input | | [kW] | 32 | 48 | 64 | 80 | 96 | | |
| Toput current [A] 62 93 124 155 186 | No. of modules | | 2 | 3 | 4 | 5 | 6 | | |
| Mominal voltage | Input | | | | | | | | |
| UPS ENERTRONIC modular with 40 kVA modules | nput current | [A] | 62 93 124 155 186 | | | | | | |
| Output power [kVA] 80 120 160 200 240*** No. of modules 2 3 4 5 6 Input power [kM] 124 186 248 310 372 Input power [kW] 86 129 172 215 256 UPS ENERTRONIC modular with 40 kVA modules VA modules 7 8 9 10 11 Input power [kW] 301 344 387 400** 440** 4 Input fower [kW] 301 344 387 430 473 5 Input power [kW] 301 344 387 430 473 5 Distortion factor (THDI) [%] ≤ 4 4 486 558 620 682 7 Input power [kW] 301 344 387 430 473 5 Distortion factor (THDI) [%] 3 x 400 / 230 + N (± 5 % programmable) 2 </td <td></td> <td></td> <td></td> <td></td> <td>x 400 / 230 ±</td> <td>15 %, +N (± 5 %</td> <td>%)</td> <td></td> | | | | | x 400 / 230 ± | 15 %, +N (± 5 % | %) | | |
| No. of modules 2 3 4 5 6 | UPS ENERTRONIC <i>modular</i> | with 40 l | «VA modules | | | | · | | |
| Input Input Input Input Input Input Input power Input p | Output power | [kVA] | 80 | 120 | 160 | 200 | 240*1 | | |
| Imput current (A) | No. of modules | 2 - 30/23 | 2 | 3 | 4 | 5 | 6 | | |
| Imput power [kW] 86 129 172 215 256 | Input | | | | Andrew Land | A STRUME | | | |
| Description Dutput power RVA 280° 320° 360° 400° 440° 440° 4 10° | nput current | [A] | 124 | 186 | 248 | 310 | 372 | | |
| Output power [kVA] 280*¹ 320*¹ 360*¹ 400*¹ 440*¹ 4 No. of modules 7 8 9 10 11 1 Input Imput Unity Imput Current [A] 434 496 558 620 682 7 Imput Dower [kW] 301 344 387 430 473 5 Distortion factor (THDI) [%] ≤ 4 2 2 99 9 <t< td=""><td></td><td></td><td></td><td></td><td>172</td><td>215</td><td>256</td><td></td></t<> | | | | | 172 | 215 | 256 | | |
| No. of modules 7 8 9 10 11 11 11 11 11 11 | UPS ENERTRONIC <i>modular</i> | with 40 l | «VA modules | S | | | | | |
| Input Input Input current IA 434 496 558 620 682 7 | Output power | [kVA] | 280*1 | 320*1 | 360*1 | 400*1 | 440*1 | 480*1 | |
| Input current Input current Input current Input current Input current Input power In | No. of modules | | 7 | 8 | 9 | 10 | 11 | 12 | |
| Input power Input power It It It It It It It I | Input | | | | | | | - | |
| Distortion factor (THDi) [%] ≤ 4 Power factor (cos φ) ≥ 0.99 Output Output voltage [V] 3 x 400 / 230 +N (± 5 % programmable) Voltage tolerance static asymmetric load dynamic ≤ 2 with 100 % load step Regulation time [ms] ≤ 20 Nominal frequency [Hz] 50 ± 0.1 % Distortion factor [%] ≤ 3 : 1 Crest factor [%] ≤ 3 : 1 Overload Inverter 150 % for 60 sec, 125 % for 10 min with three phase load 150 % for 3 sec service by-pass installed Other specifications Efficiency [%] 94.5 EMC 160 62040 - C3 Permitted ambient temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting Pb-Battery Pb-Battery V] 3 x 400 / 230 +N (± 5 % programmable) 3 x 400 / 230 +N (± 5 % programmable) 3 x 400 / 230 +N (± 5 % programmable) 3 x 400 / 230 +N (± 5 % programmable) 40 | Input current | [A] | 434 | 496 | 558 | 620 | 682 | 744 | |
| Power factor (cos φ) ≥ 0.99 Output Output voltage [V] 3 x 400 / 230 +N (± 5 % programmable) Voltage tolerance static static ≤ 1 static asymmetric load dynamic ≤ 2 with 100 % load step Regulation time [ms] ≤ 20 Nominal frequency [Hz] 50 ± 0.1 % Distortion factor √√ ≥ 3 : 1 √√ √√ ≥ 3 : 1 √√ √ √√ √√ √√ √√ √√ √√ √ √√ √√ √ √ √ √ √ √ √ √ √ √ √ √ √ √ </td <td>Input power</td> <td>[kW]</td> <td>301</td> <td>344</td> <td>387</td> <td>430</td> <td>473</td> <td>516</td> | Input power | [kW] | 301 | 344 | 387 | 430 | 473 | 516 | |
| Power factor (cos φ) ≥ 0.99 Output Voltage [V] 3 x 400 / 230 + N (± 5 % programmable) Voltage tolerance [V] 3 x 400 / 230 + N (± 5 % programmable) Voltage tolerance static ≤ 1 symmetric load dynamic ≤ 2 with 100 % load step Regulation time [ms] ≤ 20 Nominal frequency [Hz] 50 ± 0.1 % Distortion factor [%] ≤ 2 with linear load Every company ≤ 5 with non linear load EN 50091-1-1 ≥ 3 : 1 Overload Inverter 150 % for 60 sec, 125 % for 10 min with three phase load 150 % for 10 min, 500 % for 100 ms Short circuit 200 % for 3 sec 200 % for 3 sec 200 % for 3 sec Service by-pass installed Other specifications [%] 94.5 Efficiency [%] 94.5 Efficiency [%] 94.5 Efficiency [%] 94.5 Efficiency [%] 94.5 Permitted ambient temp. [°C] 0 to +40 Storage tem | The state of the s | | | | | | - | | |
| Output Output voitage [V] 3 x 400 / 230 + N (± 5 % programmable) Voitage tolerance static asymmetric load dynamic ≤ 1 ≤ 2 with 100 % ≤ 2 with 100 % load step Regulation time [ms] ≤ 20 Nominal frequency [Hz] 50 ± 0.1 % Distortion factor [%] ≤ 2 with inear load ≤ 2 with inear load EN 50091-1-1 South non linear load EN 50091-1-1 EVENT COVERION TO | Distortion factor (THDi) | [%] | | | <u>≤</u> | 4 | - | | |
| Output voltage [V] 3 x 400 / 230 + N (± 5 % programmable) Voltage tolerance static ≤ 1 asymmetric load dynamic ≤ 2 with 100 % load step Regulation time [ms] ≤ 20 Nominal frequency [Hz] 50 ± 0.1 % Distortion factor [%] ≤ 2 with linear load Crest factor [%] ≥ 3 : 1 Overload Inverter 150 % for 60 sec, 125 % for 10 min with three phase load Electronic by-pass 150 % for 10 min, 500 % for 10 ms Short circuit 200 % for 3 sec Service by-pass installed Other specifications Efficiency [%] 94.5 EMC [EC 62040 - C3 Permitted ambient temp. [°C] 0 to +40 Storage temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing installation height [m] < 2000 m over absolute altitude without derating | | | | | ≥(|).99 | | | |
| Voltage tolerance static asymmetric load dynamic ≤ 2 with 100 % load step | Output | | | | | | | | |
| Static asymmetric load dynamic S 2 with 100 % S 2 with 100 % S 5 with 100 % S 5 with 100 % S S S S S S S S S | Output voltage | [V] | | 3 x 400 / 230 +N (± 5 % programmable) | | | | | |
| asymmetric load dynamic Regulation time Regulation factor Regulation factor Regulation fine Regulation | Voltage tolerance | | | | | | | | |
| S | static | ro/ 1 | ≤1 | | | | | | |
| Regulation time [ms] ≤ 20 | asymmetric load | [%] | | | ≤ 2 wit | 1 100 % | | | |
| Nominal frequency | dynamic | | | ≤ 5 with 100 % load step | | | | | |
| Section Sec | Regulation time | [ms] | | | | | | | |
| Solution | Nominal frequency | [Hz] | | | | | | | |
| Crest factor [%] ≥ 3 : 1 Overload Inverter | Distortion factor | F0/ 1 | | | ≤ 2 with | inear load | | | |
| Overload Inverter Inv | | [%] | | ≤ 5 | with non linear | load EN 50091- | -1-1 | | |
| Inverter Electronic by-pass Short circuit Other specifications Efficiency Empty | Crest factor | [%] | | | ≥ 3 | B:1 | | | |
| Electronic by-pass 150 % for 10 min, 500 % for 100 ms Short circuit 200 % for 3 sec Service by-pass installed Other specifications Efficiency [%] 94.5 EMC 1EC 62040 - C3 Permitted ambient temp. [°C] 0 to +40 Storage temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 kVA modules 40 kVA modules Pb-Battery | Overload | | | | | | | | |
| Short circuit Service by-pass Other specifications Efficiency [%] [%] 94.5 EMC IEC 62040 - C3 Permitted ambient temp. [°C] Storage temp. [°C] Relative humidity [%] Storage temp. [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting Weight / 20 kVA modules 40 kVA modules Pb-Battery | Inverter | | | 150 % for 60 | sec, 125 % for | 10 min with thr | ee phase load | | |
| Service by-pass installed Other specifications Efficiency [%] 94.5 EMC IEC 62040 - C3 Permitted ambient temp. [°C] 0 to +40 Storage temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 kVA modules 40 kVA modules Pb-Battery | Electronic by-pass | | | 150 | 0 % for 10 min, | 500 % for 100 | ms | | |
| Other specifications Efficiency [%] 94.5 EMC IEC 62040 - C3 Permitted ambient temp. [°C] 0 to +40 Storage temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 kVA modules 40 kVA modules Pb-Battery | Short circuit | | | · | | | | | |
| Efficiency [%] 94.5 EMC IEC 62040 - C3 Permitted ambient temp. [°C] 0 to +40 Storage temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 kVA modules 40 kVA modules Pb-Battery | Service by-pass | | | | | | | | |
| Efficiency [%] 94.5 EMC IEC 62040 - C3 Permitted ambient temp. [°C] 0 to +40 Storage temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 kVA modules 40 kVA modules Pb-Battery | | | | | | | | | |
| Permitted ambient temp. [°C] 0 to +40 Storage temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 kVA modules 40 kVA modules Pb-Battery | - | rn/ 1 | | | 0 | 1 E | | | |
| Permitted ambient temp. [°C] 0 to +40 Storage temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 kVA modules 40 kVA modules Pb-Battery | | [%] | | | | | | | |
| Storage temp. [°C] -25 to +70 Relative humidity [%] 5 to 95 non condensing Installation height [m] <2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 kVA modules 40 kVA modules Pb-Battery | | [00] | | | | | | | |
| Relative humidity [%] 5 to 95 non condensing Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 kVA modules 40 kVA modules Pb-Battery | <u> </u> | | | | | | | | |
| Installation height [m] < 2000 m over absolute altitude without derating Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules [kg] 40 40 kVA modules 65 Pb-Battery | | | | | | | | | |
| Cabinet protection IP 20 Painting RAL 7035 textured Weight / 20 kVA modules 40 40 kVA modules [kg] 65 Pb-Battery | | _ | - | | | | | | |
| Painting RAL 7035 textured Weight / 20 kVA modules | | [m] | - | | | | | | |
| Weight / 20 kVA modules [kg] 40 40 FB-Battery 40 40 40 40 40 40 40 40 40 40 40 40 40 | · · · · · · · · · · · · · · · · · · · | + | | | | | | | |
| 40 kVA modules [Kg] 65 Pb-Battery | | + | | | | | | | |
| Pb-Battery 65 | • | [kg] | | | | | | | |
| <u> </u> | | . 0, | | | 6 | 5 | | | |
| No. of cells / 20 kVA modules - L - L | | | | | | | | | |
| | No. of cells / 20 kVA modules | | 2 x 108 – 132 | | | | | | |
| 40 kVA modules 2 x 120 – 132 | | _ | | | | | | | |
| Standards EN 60801, EN 60950, EN 61000, EN 62040-1, EN 62040-2, EN 62040-3, EN 62040-1-1, EN 62040-3, EN 62040-3, EN 62040-3, EN 62040-1-1, EN 62040-3, EN 62040-3 | | | | | | 2040-2, EN 620 | 140-3, EN 6204 |)-1-1, VGE | |

(*1: Systems above 240 kVA output power need the additional distribution cabinet.)

Cabinets for systems with 20 kVA modules

| Туре | Height | Width | Depth | Weight*2 |
|-----------------------|---------|-----------------|----------------|----------------|
| UC 1868 (5 modules) | 1800 mm | 600 mm | 800 mm | 190 kg |
| UC 2068 (6 modules) | 2000 mm | 600 mm | 800 mm | 210 kg |
| (*2· without modules) | Cnooifi | ontiona are out | iont to obanga | without notice |

Cabinets for systems with 40 kVA modules

| Туре | Height | Width | Depth | Weight*2 | | |
|--|---------|--------|--------|----------|--|--|
| Standard cabinets | | | | | | |
| UC 1888 (4 modules) | 1800 mm | 800 mm | 800 mm | 210 kg | | |
| UC 2088 (5 modules)*3 | 2000 mm | 800 mm | 800 mm | 240 kg | | |
| Distribution cabinets | | | | | | |
| UC 2088 | 2000 mm | 800 mm | 800 mm | 250 kg | | |
| (*3. Standard cabinets with six 40 kVA modules need the additional | | | | | | |

^{(*3:} Standard cabinets with six 40 kVA modules need the additional distribution cabinet.)

www.benning.de

ISO 9001

IS0 14001

SCC





BENNING worldwide

Austria

Benning GmbH Elektrotechnik und Elektronik Eduard-Klinger-Str. 9 3423 ST. ANDRÄ-WÖRDERN Tel.: +43 (0) 22 42/3 24 16-0 Fax: +43 (0) 22 42/3 24 23 E-mail: info@benning.at

Belarus

IOOO BENNING ul. Belorusskaya, 51-25 224025 BREST

Tel.: +375 162 / 97 47 82 Fax: +375 162 / 29 33 77 E-mail: info@benning.by

Belgium

Benning Belgium branch of Benning Vertriebsges. mbH Essenestraat 16 1740 TERNAT

Tel.: +32 (0) 2 / 5 82 87 85 Fax: +32 (0) 2 / 5 82 87 69 E-mail: info@benning.be

Croatia

Benning Zagreb d.o.o. Trnjanska 61 10000 ZAGREB

Tel.: +385 (0) 1 / 6 31 22 80 Fax: +385 (0) 1 / 6 31 22 89 E-mail: info@benning.hr

Czech Republic

Benning CR, s.r.o. Zahradní ul. 894 293 06 KOSMONOSY Tel.: +420/326721003 Fax: +420/326741299

Fax: +420/326741299 E-mail: odbyt@benning.cz

France

Benning conversion d'énergie 43, avenue Winston Churchill B.P. 418 27404 LOUVIERS CEDEX Tel.: +33 (0) / 2 32 25 23 94 Fax: +33 (0) / 2 32 25 13 95

E-mail: info@benning.fr

Germany

Benning Elektrotechnik und Elektronik GmbH & Co. KG Factory I: Münsterstr. 135-137 Factory II: Robert-Bosch-Str. 20 46397 BOCHOLT

Tel.: +49 (0) 28 71 / 93-0 Fax: +49 (0) 28 71 / 9 32 97 E-mail: info@benning.de

Great-Britain

Benning Power Electronics (UK) Ltd. Oakley House, Hogwood Lane Finchampstead BERKSHIRE RG 40 40W

Tel.: +44 (0) 1 18 / 9 73 15 06 Fax: +44 (0) 1 18 / 9 73 15 08 E-mail: info@benninguk.com

Hungary

Benning Kft.
Power Electronics
Rákóczi út 145
2541 LÁBATLAN
Tel.: +36 (0) 33 / 50 76 00
Fax: +36 (0) 33 / 50 76 01
E-mail: benning@benning.hu

Italy

Benning Conversione di Energia S.r.L Via 2 Giugno 1946, 8/B 40033 CASALECCHIO DI RENO (BO) Tel.: +39 0 51 / 75 88 00

Tel.: +39 0 51 / 75 88 00 Fax: +39 0 51 / 6 16 76 55 E-mail: info@benningitalia.com

Netherlands

Benning NL branch of Benning Vertriebsges. mbH Peppelkade 42 3992 AK HOUTEN Tel.: +31 (0) 30 / 6 34 60 10 Fax: +31 (0) 30 / 6 34 60 20 E-mail: info@benning.nl

Poland

Benning Power Electronics Sp. z o.o. Korczunkowa 30 05-503 GLOSKÓW Tel.: +48 (0) 22 / 7 57 84 53 Fax: +48 (0) 22 / 7 57 84 52 E-mail: biuro@benning.biz

P. R. China

Benning Power Electronics (Beijing) Co., Ltd. No. 6 Guangyuan Dongjie Tongzhou Industrial Development Zone 101113 BEIJING Tel.: +86 (0) 10 / 61 56 85 88

Fax: +86 (0) 10 / 61 56 85 88 Fax: +86 (0) 10 / 61 50 62 00 E-mail: info@benning.cn

Russian Federation

000 Benning Power Electronics Domodedovo town, microdistrict Severny, "Benning" estate, bldg.1 142000 MOSCOW REGION Tel.: +7 495/9676850 Fax: +7 495/9676851 E-mail: benning@benning.ru

Serbia

Benning Power Electronics doo Kornelija Stankovića 19 11000 BEOGRAD Tel.: +381 (0) 11/3 44 20 73 Fax: +381 (0) 11/3 44 20 73 E-mail: info@benning.co.rs

Slovakia

Benning Slovensko, s.r.o. Kukuričná 17 83103 BRATISLAVA Tel.: +421 (0) 2 / 44 45 99 42 Fax: +421 (0) 2 / 44 45 50 05 E-mail: benning@benning.sk

South East Asia

Benning Power Electronics Pte Ltd 85, Defu Lane 10 #05-00 SINGAPORE 539218

Tel.: +65 / 68 44 31 33 Fax: +65 / 68 44 32 79 E-mail: sales@benning.com.sg

Spair

Benning Conversión de Energía S.A. C/Pico de Santa Catalina 2 Pol. Ind. Los Linares 28970 HUMANES, MADRID Tel.: +34 91 / 6 04 81 10 Fax: +34 91 / 6 04 84 02 E-mail: benning@benning.es

Sweden

Benning Sweden AB Box 990, Hovslagarev. 3B 19129 SOLLENTUNA Tel.: +46 (0) 8 / 6 23 95 00 Fax: +46 (0) 8 / 96 97 72 E-mail: power@benning.se

Switzerland

Benning Power Electronics GmbH Industriestrasse 6 8305 DIETLIKON Tel.: +41 (0) 44 / 8 05 75 75 Fax: +41 (0) 44 / 8 05 75 80 E-mail: info@benning.ch

Turkey

Benning GmbH Turkey Liaison Office 19 Mayıs Mah. Kürkçü Sokak No:16/A 34736 Kozyatağı Kadıköy / ISTANBUL Tel.: +90 (0) 216 / 445 71 47

Fax: +90 (0) 2 16 / 4 45 7 1 46 Fax: +90 (0) 2 16 / 4 45 71 47 E-mail: info@benning.com.tr

Ukraine

Benning Power Electronics 3 Sim'yi Sosninykh str. 03148 KYIV Tel.: +380 (0) 44 / 5 01 40 45

Fax: +380 (0) 44 / 2 73 57 49 E-mail: info@benning.ua

U.S.A.

Benning Power Electronics, Inc. 1220 Presidential Drive RICHARDSON, TEXAS 75081 Tel.: +1 214/5531444 Fax: +1 214/5531355 E-mail: sales@benning.us

