

Excellent Technology, Efficiency and Quality



## **ENERTRONIC modular SE**

- Modular Three-Phase UPS Systems
- Class Leading Power Availability
- Lowest Total Cost of Ownership

# ENERTRONIC modular SE – Developed for the most demanding requirements

- **Maximum availability**
- **No single points of failure**
- **Lowest running costs**
- **Highest power quality**



Fig. 1: ENERTRONIC modular SE 40 kW module

- **Maximum availability through:**
  - Very high reliability
  - Very low mean time to repair (MTTR)
  - “hot swap” modularity
  - Modular self-configuration for N+1 redundancy
  - Black-start capability
- **No single points of failure through:**
  - Redundant critical circuits in each module
  - Multi-master operation
  - Decentralised parallel architecture
- **Lowest running costs through:**
  - Up to 96 % efficiency in double conversion mode
  - Up to 99 % efficient in „super efficiency“ mode
  - „Pay as you grow“ scalability
- **Highest power quality through:**
  - UPS classification VFI-SS-111
  - Input current total harmonic distortion (THDi) < 3 %
  - Input power factor  $\geq 0.99$  (adjustable)
  - Very high overload capability

## Optimum availability, operating costs and power quality

With its ENERTRONIC Modular SE UPS, BENNING now offers modular three-phase UPS systems that combine the benefits of class leading system availability, lowest total cost of ownership and highest power quality to protect sensitive and process critical electrical loads.

Power disturbances can have disastrous financial and operational consequences in almost every aspect of industry, commerce and data processing market sectors such as:

- **Process & Automation**
- **Infrastructure (inc. Utilities & Transport)**
- **Telecommunications**
- **Oil & Gas**
- **IT and Data Centre**

All have their own specific requirements that are fully met by the reliable, flexible and highly efficient ENERTRONIC modular SE.

# Maximum energy availability and cost-effective operation

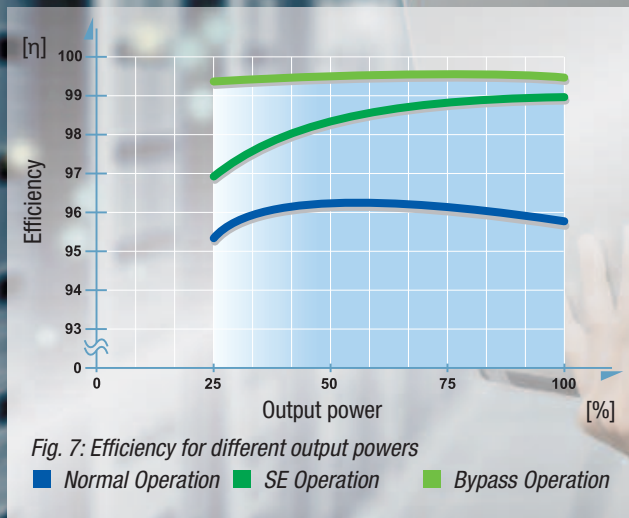


Fig. 8: IT series for ENERTRONIC modular SE

## “Hot Swap” modularity to 1,000 kW

Power capacities up to 1,000 kW can be achieved by paralleling UPS modules and cabinets. Each module can be up to 40 kW ( $\cos(\phi)=1$ ) and automatically parallel with each other in either a parallel capacity or parallel redundant mode. The parallel mode is determined by the size of the load and is parallel redundant if it can be and parallel capacity if it has to be.

### Up to 99 % efficiency

If the highest possible efficiency is more important than voltage and frequency quality the user can opt to operate the ENERTRONIC modular SE in its “Super Efficiency” mode.

In this mode the critical load is fed via the static bypass line until the voltage and/or frequency of the mains moves outside of pre-set tolerances. At this point the critical load is break-free transferred onto the UPS inverter and is therefore fully protected from damaging mains borne disturbances including brown-outs and black-outs.

In the SE mode, operating efficiencies of 99 % are achievable (see fig. 7).

### Power density of 415 kW/m<sup>2</sup>

With its top ventilation (rear ventilation available as an option) and front access only maintainability, the ENERTRONIC modular SE can be placed against a wall or in a corner etc. This minimises the system’s operational footprint and gives it the class leading power density of up to 415 kW/m<sup>2</sup>.

# ENERTRONIC modular SE – reliable power supply for operationally critical processes



Fig. 2: ENERTRONIC modular SE, 20 kW module

## Maximum availability and lowest MTTR (Mean Time To Repair)

The ENERTRONIC modular SE combines the benefits of very high reliability and a very low mean time to repair (MTTR) to create a UPS system with the highest possible availability.

By using only the highest quality components, over specifying critical components and ensuring the design values reliability before cost, Benning has created a UPS with industrial grade reliability. When such reliability is combined with the repair and maintainability benefits of true “hot swap” modularity that can replace an entire UPS module in less than 10 minutes you have a UPS with “six nines” (99.9999 %) availability.

### „Pay as you grow“ Scalability

It's not always easy to predict the size a critical load will be in, say, 10 years time and if a UPS is over-sized or under-sized, valuable capex is being wasted.

To eliminate the costs associated with significantly over-sizing or under-sizing the UPS at „day one“ an ENERTRONIC modular SE UPS system should be installed. Only the exact number of modules needed to provide the required system capacity (or redundancy) need to be installed at „day one“ and as the critical load increases, or decreases, so modules can be quickly added to, or removed from, the system to ensure that the UPS system is always sized to meet the needs of the critical load.



Fig. 3: Easy module swap due to hot plug technology and automatic module configuration.



Fig. 4: The UPS system is scalable and grows with your demands

## No Single Points of Failure

By designing redundancy into each critical circuit in each module, by incorporating „multi-master“ technology into each module that allows all modules to automatically operate as either the master or a slave, and by decentralising the parallel architecture of the modules, Benning has designed a UPS system with no single points of failure.

## Highest power quality

Each ENERTRONIC modular SE UPS module is a highly efficient double conversion, serial on-line UPS (VFI-SS-111). By supplying the critical load via the ENERTRONIC modular SE's rectifier and inverter the quality of voltage and frequency experienced by the critical load is significantly improved.

The ENERTRONIC modular SE's rectifier incorporates 3 level IGBT technology, which means low mains input distortion and active power factor correction. The ENERTRONIC modular SE's input current total harmonic distortion (THDi) is an impressive  $\leq 3\%$  and its typical power input factor is an equally impressive  $\cos(\varphi) \geq 0.99$ . Each UPS module comprises:

1. Three-phase rectifier with IGBT-3-Level technology
2. Three-phase inverter with IGBT-3-Level technology
3. Electronic switching unit (static bypass switch)
4. Redundant regulation/control unit

## Lowest Total Cost of Ownership

With its "pay as you grow" scalability and very high operating efficiency, even at partial loads, the real running costs of the ENERTRONIC modular SE are minimised without the need to compromise on power quality.

If the highest possible efficiency is more important than voltage and frequency quality, the ENERTRONIC modular SE can be operated in its "Super Efficiency" mode. In this mode the critical load is fed via the static bypass line until the voltage and/or frequency of the mains moves outside of pre-set tolerances. At this point the critical load is break-free transferred onto the UPS inverter and is therefore fully protected from damaging mains borne disturbances including brown-outs and black-outs.

## Automatic TCO and availability optimisation

The user selectable and configurable power optimisation mode automatically and simultaneously minimises total cost of ownership (TCO) and maximises system availability. It achieves this by using its inbuilt intelligence to place any individual modules in excess of the number needed to guarantee the required level of power protection into a "sleep" mode. All modules in this "sleep" mode remain fully ready to instantaneously provide power to the critical load should the need arise (e.g. in the event of a load increase) but will not be wasting energy by unnecessarily switching power. This means that the system is capable of automatically and intelligently delivering class leading system availability AND the lowest TCO.

### Display and operation

The ENERTRONIC modular SE is operated via a graphic touchscreen display. The graphic display has a mimic diagram showing energy flow. Pressing a key on one of the symbols opens a window which gives full operating data. The system's operational status and any system alarms are also optionally displayed via 17 LEDs or directly on the display.

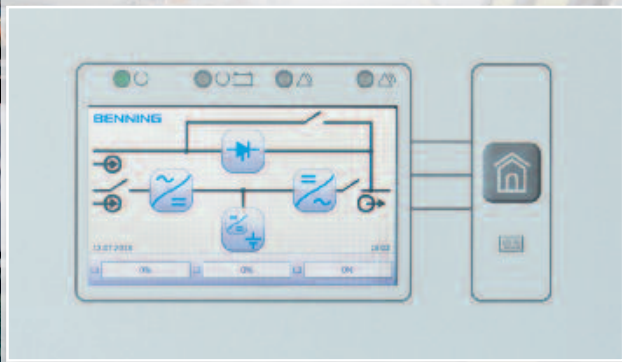


Fig. 5: Operating unit installed in the front door panel (MCU 3000)


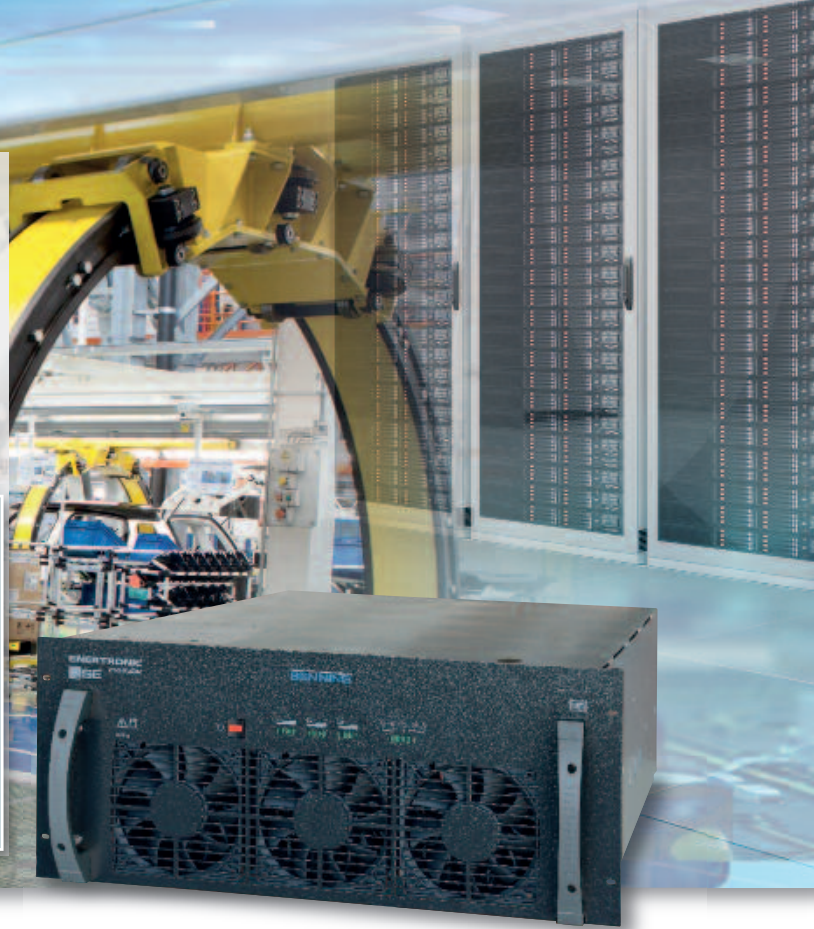


Fig. 6: ENERTRONIC modular SE, 40 kW module IT series

### Extensive reporting and monitoring functions with MCU 3000

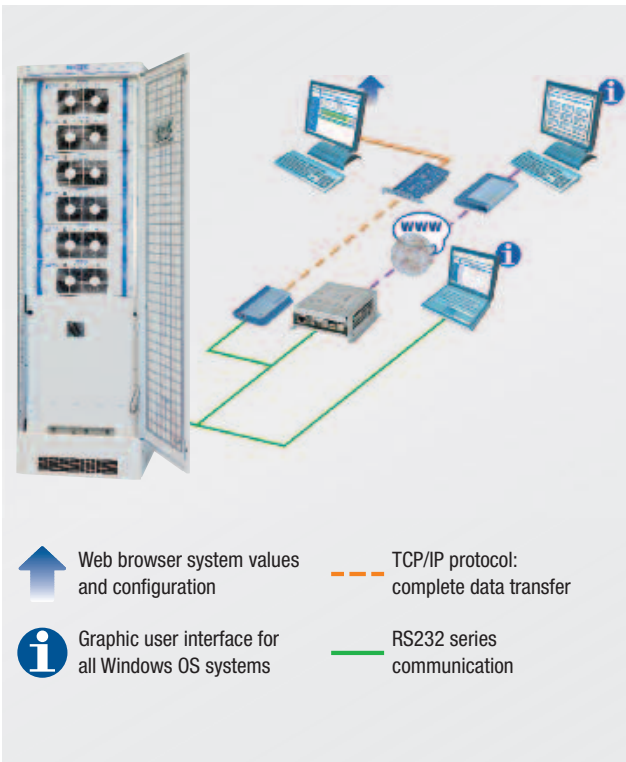


### Maintain long-term reliability – through the pro-active 360° service


By placing your trust in a BENNING UPS installation you have decided on a high-quality product from a world leader in the production of AC and DC power supplies. BENNING UPS offers a reliable, globally orientated service structure that provides the best possible support for your requirements. You have access to high-quality support, spare parts and expert knowledge – wherever and whenever you require them.

With a BENNING service contract you can rely on a high standard of service with reliable delivery dates and rapid delivery of spare parts.

With its pro-active services BENNING can help you secure the maximum availability of your current supply – helping you meet the challenges of today and the opportunities of tomorrow.

[www.benning-services.com](http://www.benning-services.com)



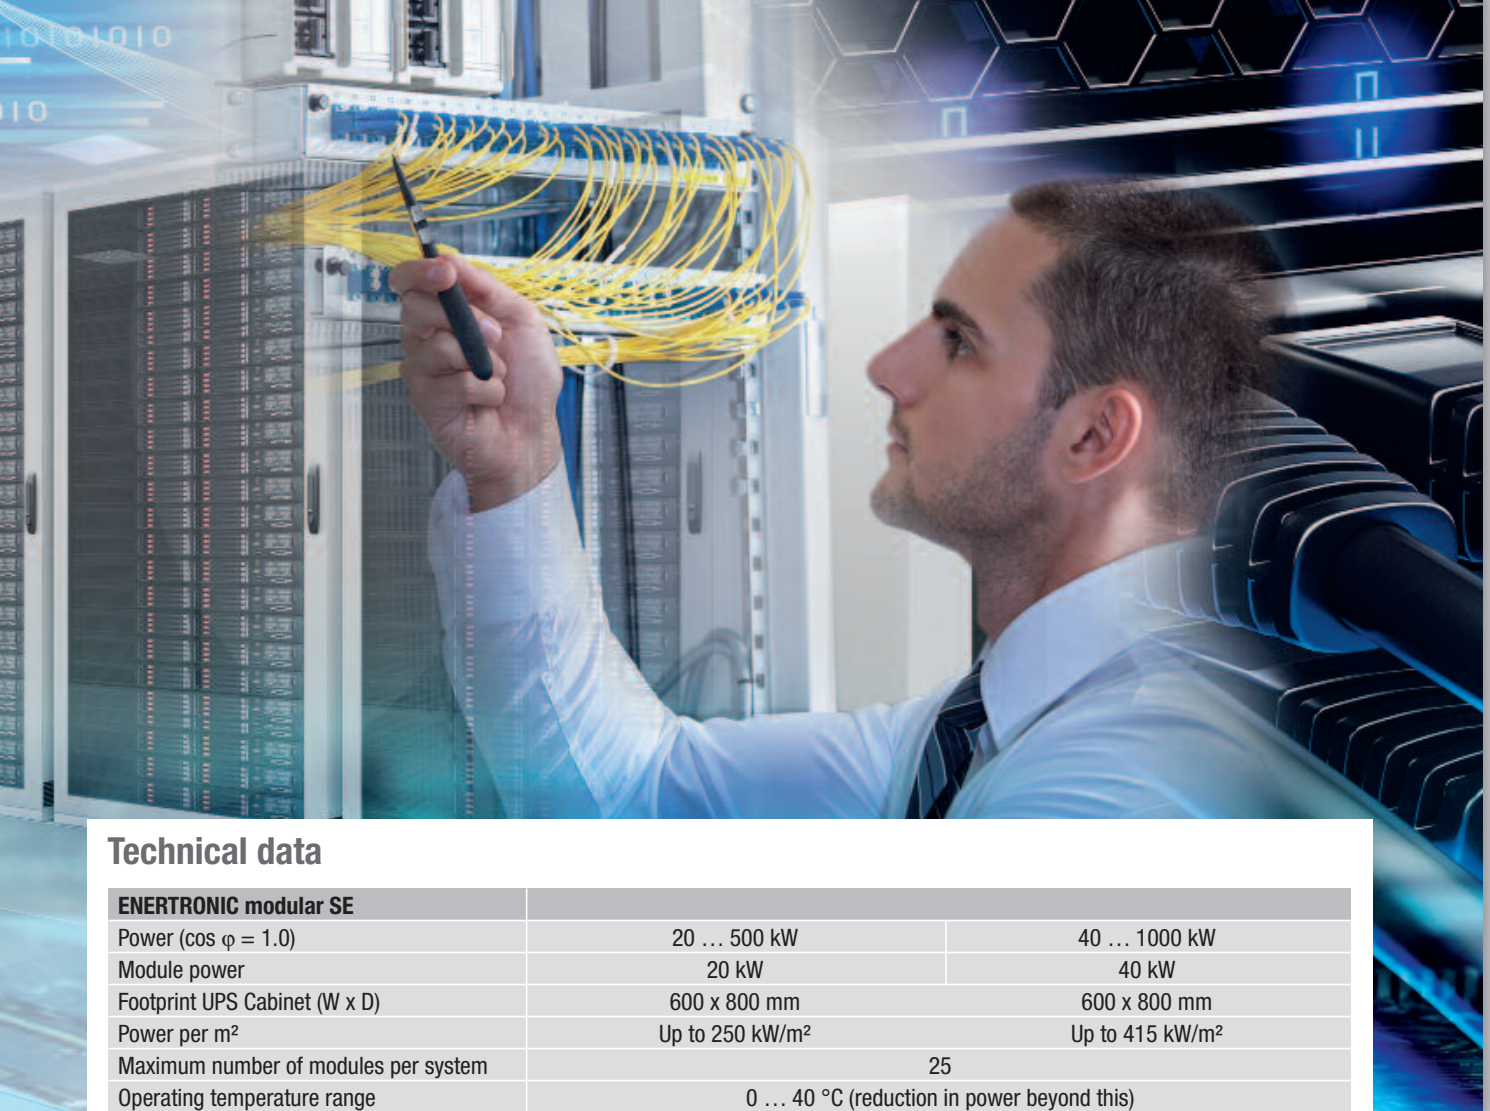

## Technical data

<b>ENERTRONIC modular SE</b>		
Power (cos φ = 1.0)	20 ... 500 kW	40 ... 1000 kW
Module power	20 kW	40 kW
Footprint UPS Cabinet (W x D)	600 x 800 mm	600 x 800 mm
Power per m <sup>2</sup>	Up to 250 kW/m <sup>2</sup>	Up to 415 kW/m <sup>2</sup>
Maximum number of modules per system	25	
Operating temperature range	0 ... 40 °C (reduction in power beyond this)	
Relative humidity	5 ... 95 % (non-condensing)	
Noise level	typical < 65 dBA (as a function of power)	
Protection	IP20 (further classes on request)	
Installation height	1000 m (without reduction in power)	
Cable entry point	Bottom (top on request)	
Paint	RAL 7035 / RAL 7021 (other colours on request)	
Ventilation	redundant forced-air ventilated	
Classification	VFI-SS-111 (according to IEC / EN 62040-3)	
Standards		
Safety	IEC / EN 62040-1, IEC / EN 60950-1	
EMC	IEC / EN 62040-2	
Power	IEC / EN 62040-3	
<b>Input</b>		
Voltage	380 / 400 / 415 V ± 15 % (3ph + N + PE)	
Frequency	50 Hz ± 5 % / 60 Hz ± 5 %	
Total distortion THDi (100 % load)	≤ 3 %	
Input power factor	≥ 0.99	
<b>Output (Inverter operation)</b>		
Voltage	380 / 400 / 415 V (3ph + N + PE)	
Voltage tolerance (static)	± 1 %	
Frequency tolerance	± 0.1 %	
Total distortion THDU	Linear load ≤ 1 %	
Efficiency	99 % (SE Mode), 96 % (double conversion)	
Overload operation, inverter	150 % for 60 s, 125 % for 10 min, 110 % for 30 min	
Overload operation, bypass	1000 % for 100 ms, 150 % for 10 min, 125 % continuously	
Short circuit response, inverter	> 220 % for 1 s	
Short circuit response, bypass	1000 % for 100 ms	
<b>Battery</b>		
Nominal voltage	480 - 576 V (240 - 288 Pb cells)	
Battery technologies	Lead, nickel cadmium, lithium ion (optional)	


*We reserve the right to make technical changes*

ISO  
9001

ISO  
14001

ISO  
50001

SCCP



## BENNING worldwide

### Austria

Benning GmbH  
Elektrotechnik und Elektronik  
Eduard-Klinger-Str. 9  
3423 ST. ANDRÄ-WÖRDERN  
Tel.: +43 (0) 22 42 / 3 24 16-0  
Fax: +43 (0) 22 42 / 3 24 23  
E-mail: info@benning.at

### Belarus

1000 BENNING  
ul. Belorusskaya, 51-25  
224025 BREST  
Tel.: +375 162 / 97 47 82  
Fax: +375 162 / 29 33 77  
E-mail: info@benning.by

### Belgium

Benning Belgium  
branch of Benning Vertriebsges. mbH  
Essenestraat 16  
1740 TERNAT  
Tel.: +32 (0) 2 / 5 82 87 85  
Fax: +32 (0) 2 / 5 82 87 69  
E-mail: info@benning.be

### Croatia

Benning Zagreb d.o.o.  
Trnjanska 61  
10000 ZAGREB  
Tel.: +385 (0) 1 / 6 31 22 80  
Fax: +385 (0) 1 / 6 31 22 89  
E-mail: info@benning.hr

### Czech Republic

Benning CR, s.r.o.  
Zahradní ul. 894  
293 06 KOSMONOSY  
Tel.: +420 / 3 26 72 10 03  
Fax: +420 / 3 26 74 12 99  
E-mail: odbyt@benning.cz

### France

Benning  
conversion d'énergie  
43, avenue Winston Churchill  
B.P. 418  
27404 LOUVIERS CEDEX  
Tel.: +33 (0) / 2 32 25 23 94  
Fax: +33 (0) / 2 32 25 13 95  
E-mail: info@benning.fr

### Germany

Benning Elektrotechnik und Elektronik  
GmbH & Co. KG  
Factory I: Münsterstr. 135-137  
Factory II: Robert-Bosch-Str. 20  
46397 BOCHOLT  
Tel.: +49 (0) 28 71 / 93-0  
Fax: +49 (0) 28 71 / 93 92 97  
E-mail: info@benning.de

### Great-Britain

Benning Power Electronics (UK) Ltd.  
Oakley House, Hogwood Lane  
Finchampstead  
BERKSHIRE  
RG 40 4QW  
Tel.: +44 (0) 1 18 / 9 73 15 06  
Fax: +44 (0) 1 18 / 9 73 15 08  
E-mail: info@benninguk.com

### Hungary

Benning Kft.  
Power Electronics  
Rákóczi út 145  
2541 LÁBATLAN  
Tel.: +36 (0) 33 / 50 76 00  
Fax: +36 (0) 33 / 50 76 01  
E-mail: benning@benning.hu

### Italy

Benning Conversione di Energia S.r.l.  
Via 2 Giugno 1946, 8/B  
40033 CASALECCHIO DI RENO (BO)  
Tel.: +39 0 51 / 75 88 00  
Fax: +39 0 51 / 6 16 76 55  
E-mail: info@benningitalia.com

### Netherlands

Benning NL  
branch of Benning Vertriebsges. mbH  
Peppelkade 42  
3992 AK HOUTEN  
Tel.: +31 (0) 30 / 6 34 60 10  
Fax: +31 (0) 30 / 6 34 60 20  
E-mail: info@benning.nl

### Poland

Benning Power Electronics Sp. z o.o.  
Korczyńska 30  
05-503 GŁOSKÓW  
Tel.: +48 (0) 22 / 7 57 84 53  
Fax: +48 (0) 22 / 7 57 84 52  
E-mail: biuro@benning.biz

### P. R. China

Benning Power Electronics (Beijing) Co., Ltd.  
No. 6 Guangyuan Dongjie  
Tongzhou Industrial Development Zone  
101113 BEIJING  
Tel.: +86 (0) 10 / 61 56 85 88  
Fax: +86 (0) 10 / 61 50 62 00  
E-mail: info@benning.cn

### Russian Federation

000 Benning Power Electronics  
Domodedovo town,  
microdistrict Severny,  
"Benning" estate, bldg.1  
142000 MOSCOW REGION  
Tel.: +7 4 95 / 9 67 68 50  
Fax: +7 4 95 / 9 67 68 51  
E-mail: benning@benning.ru

### Serbia

Benning Power Electronics doo  
Ratarski put 35b  
11186 Beograd  
Tel.: +381 (0) 11 / 3 16 14 29  
Fax: +381 (0) 11 / 3 16 14 29  
E-mail: info@benning.co.rs

### Slovakia

Benning Slovensko, s.r.o.  
Kukuricná 17  
83103 BRATISLAVA  
Tel.: +421 (0) 2 / 44 45 99 42  
Fax: +421 (0) 2 / 44 45 50 05  
E-mail: benning@benning.sk

### South East Asia

Benning Power Electronics Pte Ltd  
85, Defu Lane 10  
#05-00  
SINGAPORE 539218  
Tel.: +65 / 68 44 31 33  
Fax: +65 / 68 44 32 79  
E-mail: sales@benning.com.sg

### Spain

Benning Conversión de Energía S.A.  
C/Pico de Santa Catalina 2  
Pol. Ind. Los Linares  
28970 HUMANES, MADRID  
Tel.: +34 91 / 6 04 81 10  
Fax: +34 91 / 6 04 84 02  
E-mail: benning@benning.es

### Sweden

Benning Sweden AB  
Box 990, Hovslagarev. 3B  
19129 SOLLENTUNA  
Tel.: +46 (0) 8 / 6 23 95 00  
Fax: +46 (0) 8 / 96 97 72  
E-mail: power@benning.se

### Switzerland

Benning Power Electronics GmbH  
Industriestrasse 6  
8305 DIETLIKON  
Tel.: +41 (0) 44 / 8 05 75 75  
Fax: +41 (0) 44 / 8 05 75 80  
E-mail: info@benning.ch

### Turkey

Benning GmbH Turkey Liaison Office  
19 Mayıs Mah. Kürkçü Sokak No:16/A  
34736 Kozyatağı  
Kadıköy / İSTANBUL  
Tel.: +90 (0) 2 16 / 4 45 71 46  
Fax: +90 (0) 2 16 / 4 45 71 47  
E-mail: info@benning.com.tr

### Ukraine

Benning Power Electronics  
3 Sim'yi Sosninykh str.  
03148 KYIV  
Tel.: +380 (0) 44 / 5 01 40 45  
Fax: +380 (0) 44 / 2 73 57 49  
E-mail: info@benning.ua

### U.S.A.

Benning Power Electronics, Inc.  
1220 Presidential Drive  
RICHARDSON, TEXAS 75081  
Tel.: +1 2 14 / 5 53 14 44  
Fax: +1 2 14 / 5 53 13 55  
E-mail: sales@benning.us

**BENNING**